



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>C11D 1/00, 3/00, 3/37</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/14540</b> <b>(43) International Publication Date:</b> 9 April 1998 (09.04.98)
<b>(21) International Application Number:</b> PCT/US97/06430 <b>(22) International Filing Date:</b> 17 April 1997 (17.04.97)  <b>(30) Priority Data:</b> 08/720,932 4 October 1996 (04.10.96) US  <b>(71) Applicant:</b> E.I. DU PONT DE NEMOURS AND COMPANY [US/US]; 1007 Market Street, Wilmington, DE 19898 (US). <b>(72) Inventor:</b> DEL PESCO, Thomas, Wayne; 344 Skyline Orchard Drive, Hockessin, DE 19707 (US). <b>(74) Agent:</b> MEDWICK, George, M.; E.I. du Pont de Nemours and Company, Legal Patent Records Center, 1007 Market Street, Wilmington, DE 19898 (US).		<b>(81) Designated States:</b> AU, BR, CA, JP, MX, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> CLEANING FORMULATIONS FOR TEXTILE FABRICS  <b>(57) Abstract</b>  This invention relates to aqueous cleaning formulations particularly useful in the hot water extraction cleaning of textile fabrics such as rugs, carpets and upholstery. The cleaning formulations comprise 0.1 to 50 grams of an inorganic or organic builder per gallon of cleaning formulation, 0.1 to 100 grams of a mixed alkyl ethoxylate (C <sub>10</sub> -C <sub>16</sub> ) nonionic surfactant, with a hydrophile-lipophile balance value in the range of 10.5 to 15, per gallon of cleaning formulation, and 0.1 to 100 grams of a fluorosurfactant per gallon of cleaning formulation.		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LJ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## TITLE

### **CLEANING FORMULATIONS FOR TEXTILE FABRICS**

## FIELD OF THE INVENTION

5           This invention relates to aqueous cleaning formulations particularly useful in the hot water extraction cleaning of textile fabrics such as rugs, carpets and upholstery.

## CROSS-REFERENCE TO RELATED APPLICATION

10           This application is a continuation-in-part of application Serial No. 08/626,080, filed April 1, 1996 (RD-7145).

## BACKGROUND OF THE INVENTION

Hot water extraction is currently a preferred method for cleaning textile  
15   fabrics such as rugs, carpets and upholstery. In such a method, hot, aqueous cleaning solution is sprayed onto the fabric to be cleaned, e.g., a carpet, and then rapidly removed by vacuum. Typically, application is by a wand which contains both a sprayer and vacuum head. Under optimum conditions, one pass of the wand would restore a dirty carpet to its original cleanliness. However, in practice it  
20   takes many passes of the wand to restore a carpet to a condition approaching its original cleanliness.

The literature contains many cleaning formulations suitable for use in hot water extraction cleaning systems. It would be advantageous if a cleaning  
25   formulation could be developed which would reduce the number of times that the wand must be passed over the carpet in order to obtain a satisfactorily cleaned carpet. Such a cleaning formulation would have environmental benefits, since less water and cleaning ingredients would be needed to clean the carpet. A further advantage would be if the residue from a cleaning formulation left on a carpet did  
30   not attract dirt and food additives. The present invention provides such cleaning formulations.

## SUMMARY OF THE INVENTION


This invention provides aqueous cleaning formulations comprising 0.1 to  
35   50 grams of an inorganic or organic builder per gallon of cleaning formulation, 0.1 to 100 grams of a mixed alkyl ethoxylate (C<sub>10</sub>-C<sub>16</sub>) nonionic surfactant, with a hydrophile-lipophile balance (HLB) value in the range of 10.5 to 15, per gallon of

cleaning formulation, and 0.1 to 100 grams of a fluorosurfactant per gallon of cleaning formulation.


In addition, the aqueous cleaning formulation may contain 1.0 to 500 grams of soil-resist agent per gallon of cleaning formulation and/or 1.0 to 500 grams of stain-resist agent per gallon of cleaning formulation. Suitable soil-resist agents include, for example, fluorochemicals and poly(methyl methacrylate). Suitable stain-resist agents include those selected from the group consisting of a polymer of hydrolyzed maleic anhydride with an aliphatic alpha olefin, an aromatic olefin, or vinyl ether and a polymer of methacrylic acid.

The builder in the cleaning formulation may be an inorganic builder selected from the group consisting of sodium tripolyphosphate, sodium sesquicarbonate and mixtures thereof, as well as other materials normally considered as builders in cleaning formulations, such as ethylenediaminetetraacetic acid (EDTA). The fluorosurfactant in the cleaning formulation may comprise any anionic or nonionic compound or mixture of compounds such as, for example, the compounds of Formula I and Formula II,

where Formula I is:



wherein n is an integer having a value of 6 to 12; and where Formula II is:

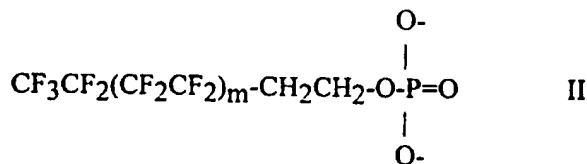

wherein m is an integer having a value of 2 to 5.

One example of the cleaning formulation of this invention comprises sodium tripolyphosphate as the inorganic builder, a mixed alkyl ethoxylate (C<sub>10</sub>-C<sub>16</sub>) having a hydrophile-lipophile balance value of 12.8 as the nonionic surfactant, and the above-described mixture of fluorosurfactant compounds. In such a formulation, the concentration of sodium tripolyphosphate may be about 1 to 30 grams/gallon of formulation, the concentration of mixed alkyl ethoxylate

nonionic surfactant may be about 1 to 30 grams/gallon of formulation, and the concentration of fluorosurfactant may be about 1 to 20 grams/gallon of formulation.

5           This invention also includes cleaning concentrates suitable for making the aqueous cleaning formulations of this invention. The cleaning concentrate comprises: (a) an inorganic or organic builder, (b) a mixed alkyl ethoxylate (C<sub>10</sub>-C<sub>16</sub>) nonionic surfactant with a hydrophile-lipophile balance value in the range of 10.5 to 15, and (c) a fluorosurfactant, whereby the concentrate is capable of being  
10       diluted with an appropriate amount of water to produce an aqueous cleaning formulation having a concentration of 0.1 to 50 grams of inorganic or organic builder per gallon of cleaning formulation, 0.1 to 100 grams of mixed alkyl ethoxylate (C<sub>10</sub>-C<sub>16</sub>) nonionic surfactant, with a hydrophile-lipophile balance value in the range of 10.5 to 15, per gallon of cleaning formulation, and 0.1 to 100  
15       grams of fluorosurfactant per gallon of cleaning formulation. The cleaning concentrate may further comprise a soil-resist agent and/or a stain-resist agent. These concentrates are capable of being used to make aqueous cleaning formulations having 1.0 to 500 grams of soil-resist agent and/or stain-resist agent per gallon of cleaning formulation.

20

          This invention also provides a method of using the above-described aqueous cleaning formulations to clean a textile fabric, such as rugs, carpets, and upholstery, having soil on its surface comprising the steps of spraying the formulation having a temperature in the range of room temperature to 160°F onto  
25       the surface of the textile fabric such that at least some of the soil on the surface is loosened; and removing the loosened soil. The loosened soil may be removed by vacuum or other suitable means.

#### **BRIEF DESCRIPTION OF THE FIGURES**

30           Figure 1 is a graph showing the percent changes in  $\Delta E$  versus the number of wand passes with Control Sample Cleaning Formulations 1-21 as reported in Table I.

#### **DETAILED DESCRIPTION OF THE INVENTION**


35           This invention provides an aqueous cleaning formulation which, when used in a hot water extraction cleaning process, improves the cleaning rate of the process (i.e. reduces the number of times the extraction wand must be run over the same area of the textile fabric to be cleaned in order to achieve the desired degree

of cleanliness). This invention also relates to a method of using the cleaning formulation to clean textile fabrics.


In the method of this invention, the selected cleaning formulation having a temperature in the range of room temperature to 160°F is sprayed onto the surface of the textile fabric in such a manner that at least some of the soil on the fabric's surface is loosened, and this loosened soil is then removed. Some of the loosened soil may be dispersed in the formulation. Suitable means for removing the loosened soil include vacuuming.

The aqueous cleaning formulations of this invention comprise (a) an inorganic or organic builder; (b) a mixed alkyl ethoxylate (C<sub>10</sub>-C<sub>16</sub>) nonionic surfactant with an HLB (hydrophile-lipophile balance) value in the range of 10.5 to 15, preferably 10.5 to 13, for example "Merpol" SH, (available from DuPont Co., Wilmington, DE) and (c) a fluorosurfactant.

Suitable inorganic builders include, for example, sodium tripolyphosphate, sodium sesquicarbonate, and mixtures thereof. Suitable organic builders include, for example, ethylenediaminetetraacetic acid (EDTA). By the term "builder", it is meant a chemical which softens water by chelating metal ions. Mixtures of inorganic and organic builders can also be used. By the term, "mixed alkyl ethoxylate (C<sub>10</sub>-C<sub>16</sub>)" it is meant a mixture of alkyl ethoxylate compounds having a carbon chain length in the range of C<sub>10</sub> to C<sub>16</sub>. Suitable fluorosurfactants include but not limited to, for example, those compounds commercially available from DuPont, 3M. Mixtures of fluorosurfactants may also be used. A suitable mixture of fluorosurfactants is that of the compounds of Formula I and Formula II, where Formula I is:




wherein n is an integer having a value of 6 to 12 and may be identified as an α-{2-[(2-carboxyethyl)thio]ethyl}-ω-fluoro-poly-(difluoromethylene) lithium salt, and wherein Formula II is an amine salt of a perfluoroalkyl phosphate as represented by the general formula:

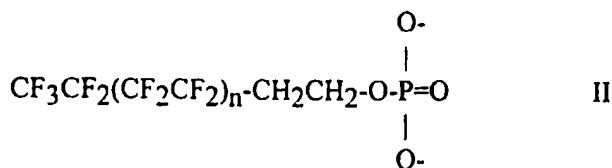

wherein n is an integer having a value of 6 to 12. The weight ratio of Formula I to the perfluoroalkyl phosphate of Formula II in the mixture is in the range of from about 1:1 to about 1:2. The compound of Formula I is available from DuPont as "Zonyl" FSA and the compound of Formula II is available from DuPont as "Zonyl" FSP.


Other suitable fluorosurfactants include the compounds of Formula III and IV, wherein Formula III is:

10



wherein n is an integer having a value of 6 to 12.

15 and wherein Formula IV is:



20 wherein n is an integer having a value of 6 to 12, y is an integer having a value of less than 20, and x is an integer having a value of less than y.

The compound of Formula III is available from DuPont as "Zonyl" FSN and the compound of Formula IV is available from DuPont as "Zonyl" FSO. Fluorosurfactants available from 3M may also be used including "Florad" products designated as FC-93, FC-100, FC-120, FC-129, and FC-117.

As will be demonstrated in the Examples hereinafter, the choice of nonionic surfactant is critical to the efficacy of the cleaning formulation. Nonionic surfactants having HLB values outside of the range of 10.5 to 15 either do not clean as well as those having HLB values within that range or their residue left on the carpet attracts dirt (increases resoiling) more than nonionic surfactants having HLB values within that range.

Depending on the actual builder, nonionic surfactant, and fluorosurfactant used in the cleaning formulation, the useful concentrations of each ingredient will vary. Generally, the concentration of the inorganic or organic builder should be in the range of 0.1 to 50 grams per gallon of cleaning formulation, the concentration of the mixed alkyl ethoxylate (C<sub>10</sub>-C<sub>16</sub>) nonionic surfactant with a HLB value in

the range of 10.5 to 15 should be in the range of 0.1 to 100 grams per gallon of cleaning formulation, and the concentration of fluorosurfactant should be in the range of 0.1 to 100 grams per gallon of cleaning formulation.

5            Optionally, the cleaning formulation may contain a polymeric chemical, usually a polymer containing fluorine such as commercial products made by DuPont, 3M, etc., in order to reduce resoiling and may also optionally contain a stain-resist agent, preferably a styrene maleic anhydride, in order to reduce restaining. By "resoiling" it is meant the tendency of a cleaned carpet to attract  
10 dirt because of cleaning formulation left on the carpet after cleaning. Similarly, by "restaining" it is meant the tendency of a cleaned carpet to attract stains which may be caused in part because of cleaning formulation left on the carpet after cleaning.

15            One embodiment of the cleaning formulation of this invention contains 0.5 to 50 g/gal. of sodium tripolyphosphate builder, 0.1 to 50 g/gal. of sodium sesquicarbonate builder, 1 to 50 g/gal. of Merpol SH, and 0.5 to 100 g/gal. of a fluorosurfactant mixture of the above Formula I compound and Formula II compound. Preferably, the concentration of sodium tripolyphosphate is about 1 to  
20 30 g/gal., sodium sesquicarbonate is about 0.5 g/gal., "Merpol" SH is about 1 to 30 g/gal., and fluorosurfactant is about 1 to 20 g/gal. All concentrations are based on a gallon of the cleaning formulation, unless otherwise indicated.

             If resistance to resoiling is required, 1 to 500 g/gal. soil resist agent may be  
25 added to the basic formulations described above. By "soil resist agent" it is meant compositions which resist or repel dirt, oil, or other substances not normally intended to be present on the textile fabric. Suitable soil-resist agents include fluorochemicals and poly (methyl methacrylate). Fluorochemical soil resist agents may include polymers or compounds having pendent or end groups of  
30 perfluoroalkyl moieties, fluorosurfactants, or fluoro-intermediates. Examples of some suitable fluorochemical soil resist agents include "Zonyl" 5180, available from DuPont and "Scotchgard" available from 3M. "Zonyl" 5180 works very well at a concentration of about 50-250 g/gal. Depending on the desired end-use of the aqueous cleaning formulation, the amount of soil-resist agent and other  
35 ingredients should be adjusted. If the primary use of the cleaning formulation is to improve cleaning efficiency, less soil-resist agent should be added to the formulation. If the primary use of the cleaning formulation is to improve resoiling performance, more soil-resist agent should be added to the formulation.

If resistance to restaining is required, 1 to 500 g/gal. of a stain-resist agent may be added to any of the above formulations. By "stain-resist agent" it is meant chemicals which impart partial or total resistance to staining. Staining is defined as discoloration due to a material (such as food or liquid) adding color that exhibits resistance to removal by standard cleaning methods. Stain resist agents may include compounds such as hydrolyzed maleic anhydride co- or terpolymers with aliphatic alpha olefins, aromatic olefins or vinyl ethers, and homo- or copolymers of methacrylic acid. Preferably the stain resist agent is "Zelan" 338 which is available from the DuPont. "Zelan" 338 works very well at about 50-250 g/gal. Depending on the desired end-use of the aqueous cleaning formulation, the amount of stain-resist agent and other ingredients should be adjusted. If the primary use of the cleaning formulation is to improve cleaning efficiency, less stain-resist agent should be added to the formulation. If the primary use of the cleaning formulation is to improve restaining performance, more stain-resist agent should be added to the formulation.

Other chemical agents, such as fragrances, softeners, buffers, and brighteners may be added to the cleaning formulation to obtain special effects on the cleaned carpet fiber.

As described above, the aqueous cleaning formulations of this invention refer to the formulations as they are applied to textile fabrics such as carpets. It is recognized that cleaning concentrates suitable for making the aqueous cleaning formulations of this invention by dilution with water can also be made. These cleaning concentrates would then be provided to the carpet cleaner or other end-user. The present invention also encompasses such cleaning concentrates. The cleaning concentrate comprises: (a) an inorganic or organic builder, (b) a mixed alkyl ethoxylate (C<sub>10</sub>-C<sub>16</sub>) nonionic surfactant with a hydrophile-lipophile balance value in the range of 10.5 to 15, and (c) a fluorosurfactant, whereby the concentrate is capable of being diluted with an appropriate amount of water to produce an aqueous cleaning formulation having a concentration of 0.1 to 50 grams of inorganic or organic builder per gallon of cleaning formulation, 0.1 to 100 grams of mixed alkyl ethoxylate (C<sub>10</sub>-C<sub>16</sub>) nonionic surfactant with a hydrophile-lipophile balance value in the range of 10.5 to 15, per gallon of cleaning formulation, and 0.1 to 100 grams of fluorosurfactant per gallon of cleaning formulation. The cleaning concentrate may further comprise a soil-resist agent and/or a stain-resist agent. These concentrates may be used to make

aqueous cleaning formulations having 1.0 to 500 grams of soil-resist agent and/or stain-resist agent per gallon of cleaning formulation.

5 The following Examples are illustrative of this invention but should not be construed as limiting the scope of this invention.

### **TEST METHODS**

Cleaning Efficiency - Cleaning efficiency refers to both the cleaning rate and cleaning ceiling which are determined by these test procedures. Cleaning rate  
10 is a measure of how many times a hot water extraction wand has to be run over the same area of a soiled carpet before a desired degree of cleanliness is achieved. Cleaning ceiling is a measure of the efficacy of a cleaning formulation towards returning a soiled carpet to its original, unsoiled condition by repeated cleanings with the hot water extraction wand.

15

The equipment used was a standard hot water extractor (Stallion Walk Behind Unit Model No. 8SC) equipped with an in-line heater and 3.5 inch upholstery cleaning head with 1 jet. A Minolta CR-100 Chroma Meter was used to measure  $\Delta E$  of the carpets before cleaning and intermittently throughout the  
20 cleaning process.  $\Delta E$  is a measure of cleanliness since dirty carpets appear dark and they lighten on cleaning.

In preparation for cleaning the carpet with the cleaning formulation, the formulation to be tested was loaded in the extractor, the line was flushed, and the  
25 carpet was vacuumed prior to application of the formulation. The cleaning procedure involved the following steps.

- (a) The spray and vacuum head (wand) was run on the designated test area of the carpet to be cleaned at a steady linear motion of about 2  
30 sec./foot. This was followed immediately with a vacuum cycle only; the area cleaned was about 8-10 inches by 3.5 inches.
- (b) The change in appearance  $\Delta E$  was measured and recorded.
- (c) After one minute, step (a) was repeated twice and  $\Delta E$  measured again.  
35

Step (c) was repeated as many times as necessary, until the measured  $\Delta E$  no longer changed significantly (usually 2-3 sets). These  $\Delta E$  measurements were made at different places within the test area of the carpet. The average value of the  $\Delta E$  measurements from the different places within the test area of the carpet was reported.

Cleaning rate is determined by the change in the  $\Delta E$  with each wand or pair of wand passes (cleaning treatments). However since the carpet has been soiled by actual people walking on the carpet, some areas of the carpet are more soiled than others and there is a variation in the degree of soiling in any selected test area of carpet. In order to compensate for variations in the  $\Delta E$  of the soiled, uncleaned carpet, the change in  $\Delta E$  with each wand pass was divided by the  $\Delta E$  of the initial soiled test area of the carpet which was subjected to the wand pass. This cleaning rate for each wand pass may be expressed as a percentage change in  $\Delta E$  per the following equation:

$$\frac{(\Delta E \text{ of soiled carpet}) - (\Delta E \text{ of carpet after wand pass})}{(\Delta E \text{ of soiled carpet})} \times 100$$

The percentage change in  $\Delta E$  is tantamount to measuring the cleaning percentage of the carpet with 100% representing the appearance of new, clean carpet and 0% representing soiled, uncleaned carpet. New, clean carpet was available and was used as the standard (target) in the Minolta measurements and for determining the efficacy, (as a percentage change in  $\Delta E$ ) of the cleaning formulation toward returning the soiled carpet to its original condition. The standard value of the new clean carpet was first measured by the Minolta Chroma Meter and this value was then stored in the memory of the Minolta Chroma Meter. The value of the soiled carpet was then measured by the Minolta Chroma Meter, and the  $\Delta E$  was calculated therefrom.

Resoiling Test - The ability of a cleaned carpet to resist resoiling was determined by an accelerated soiling test wherein a cleaned carpet was exposed to a controlled amount of soil for a specified time, vacuumed to remove loose soil and the  $\Delta E$  measured. As in the Cleaning Efficiency Test, new, clean carpet was used as the standard (target) in the Minolta measurements. The standard value for the new, clean carpet was first measured and the  $\Delta E$  of the resoiled carpet was calculated therefrom.

In addition to the Minolta Chroma Meter, the equipment used in this Resoiling Test included a ball mill having a drum 10.5 inches deep, 40 inches in circumference and dirty polymer pellets (used to introduce a controlled amount of soil). The dirty polymer pellets were prepared by adding 3g of synthetic soil to  
5 1000g of nylon polymer pellets and mixing in the ball mill for 10 minutes at 30 rpm. The synthetic soil was prepared according to AATCC Test Method 123-1989 and contained (percentages are by weight): 38% dark peat moss, 17% portland cement, 17% kaolin clay, 17% silica (200 mesh), 1.75% carbon black (furnace or lamp black), 0.5% red iron oxide and 8.75% mineral oil (medicinal  
10 grade).

Carpets were soiled by mounting them in the clean drum, double taping at the seams. 500g of soiled polymer pellets were then added along with cylindrical grinding stones (12 x 67.5g stones and 200 4.5g stones). The mill was run at 30  
15 rpm for 30 minutes. Carpets were removed, vacuumed with a vacuum cleaner not having a beater bar to remove loose dirt, and the  $\Delta E$  was measured.

### EXAMPLES

#### Control Samples 1-21

20 In order to illustrate the improvement in cleaning efficiency obtained by using the cleaning formulations of this invention, control cleaning formulations of 21 commercially available cleaners were first used to clean a soiled test carpet. The above-described hot water extraction method was used to clean the carpets, and the cleaning efficiency was determined per the above-described Test Methods.  
25 The carpet used was a nylon carpet made from DuPont "Antron" Legacy nylon 6,6 fibers. The color of the nylon carpet was a light beige and was installed in a busy commercial setting where it was subjected to heavy traffic daily.

The data showing the percentage changes in  $\Delta E$  data are contained in  
30 Table I and shown graphically in Figure 1.

**TABLE I**  
**CLEANING EFFICIENCY**

(Percent Change In  $\Delta E$  Measured For 0 To 20 Wand Passes)

5

Control Cleaning Formulation	No. of Wand Passes							
	0	1	3	5	7	10	15	20
1	0%	0%	24%	29%	33%	39%	47%	51%
2	0%	26%	46%	51%	54%	58%	62%	66%
3	0%	-3%	15%	29%	37%	45%	54%	62%
4	0%	-6%	6%	15%	27%	39%	49%	55%
5	0%	22%	60%	71%	74%	78%	82%	84%
6	0%	13%	45%	57%	63%	70%	76%	79%
7	0%	-8%	7%	20%	29%	38%	48%	55%
8	0%	-5%	16%	30%	40%	50%	60%	66%
9	0%	-6%	19%	37%	51%	61%	71%	73%
10	0%	13%	48%	60%	67%	75%	79%	80%
11	0%	-4%	12%	23%	31%	39%	48%	55%
12	0%	11%	49%	69%	76%	81%	84%	85%
13	0%	-16%	3%	20%	37%	55%	69%	77%
14	0%	-3%	9%	20%	28%	37%	48%	55%
15	0%	-19%	-5%	6%	21%	28%	39%	46%
16	0%	-6%	29%	53%	63%	71%	77%	79%
17	0%	17%	55%	66%	69%	73%	78%	80%
18	0%	-9%	0%	9%	14%	22%	31%	36%
19	0%	15%	36%	45%	56%	61%	67%	74%
20	0%	-5%	3%	14%	21%	30%	35%	41%
21	0%	17%	39%	49%	58%	64%	72%	74%

From Figure 1, it can be seen that some commercial cleaning formulations actually make the carpet look dirtier (negative percent change in  $\Delta E$ ) before making it look cleaner (positive percent change in  $\Delta E$ ). After seven passes of the wand cleaning head, there is a large difference in carpet cleaning level (62% change in  $\Delta E$ ) between the commercially available cleaners. The commercial cleaners (Samples Nos. 5 and 12) which had good cleaning rates (positive percent changes in  $\Delta E$  of at least 10% after 1 wand pass), and the best cleaning ceiling

(largest positive percent changes in  $\Delta E$  after 20 wand passes) were used as controls in the following Examples.

### EXAMPLE 1

5 This Example illustrates the criticality of the particular nonionic surfactant used in the cleaning formulations of this invention. Four different nonionic surfactants were tested in similar cleaning compositions. The four nonionic surfactants were "Merpol" SE (HLB=10.5), "Merpol" SH (HLB=12.8), "Merpol" LFH (HLB=10), and "Merpol" HCS (HLB=15.3). The Cleaning Efficiency of the  
10 different formulations was measured on a soiled nylon 6 carpet composed of nylon 6 fibers having trilobal cross-sections per the Test Methods described above.

**TABLE II**  
**CLEANING EFFICIENCY**

(Percent Change In  $\Delta E$  Measured For 0 TO 5 Wand Passes)

STPP* gms/gal	CLEANING FORMULATION		NO. OF WAND PASSES			
	Nonionic Surfactant	gms/gal nonionic Surfactant	0	1	3	5
10	"Merpol" SE	5	0	-12%	36%	53%
10	"Merpol" SH	10	0	14%	53%	63%
10	"Merpol" LFH	10	0	4%	42%	55%
10	"Merpol" HCS	10	0	6%	49%	60%
0**	"Merpol" SH	10	0	-13%	17%	34%

20

\* The first four cleaning formulations contained 0.5 grams/gallon of sodium sesquicarbonate builder.

STPP = sodium tripolyphosphate.

25

\*\* This cleaning formulation did not contain any STPP or sodium sesquicarbonate builder. Instead, this cleaning formulation contained 5 grams of "Zonyl" 7950 fluorosurfactant per gallon of formulation.

**TABLE III**  
**RESOILING PERFORMANCE OF CLEANING FORMULATIONS**  
 (Concentration of Ingredient in Grams Per Gallon of Cleaning Formulation)

5

STPP	Merpol SE	Merpol SH	Merpol LFH	Merpol HCS	Fluoro- Surfactant **	Fluoro- Chemical ***	Resoiling Performance ( $\Delta E$ )
					----- NONE -----*		8.4
0	5	0	0	0	0	0	7.1
10	0	10	0	0	0	0	7.1
10	0	0	10	0	0	0	8.7
10	0	0	0	7.7	0	0	9.9
10	0	5	0	0	5	0	6.9
10	0	9.5	0	0	5	246	4.0
0	0	10.5	0	0	5	0	7.3

\* This control carpet was not washed; rather, it was tested in its original clean condition.

10 \*\* Fluorosurfactant is "Zonyl" 7950

\*\*\* Fluorochemical is "Zonyl" 5180

15 The carpet used for measuring the resoiling performance was a new, clean nylon 6,6 carpet composed of nylon 6,6 fibers having voids in their cross-sections as described in U.S. Patent 3,745,061. The carpet was topically treated with a fluorochemical soil-resist agent by the carpet manufacturer. The new carpet was washed with the specified cleaning formulation, dried at room temperature, and then tested for resoiling performance per the drum method described under the above Test Methods. In the above Table III, a lower  $\Delta E$  value means the carpet resisted resoiling better than a carpet with a higher  $\Delta E$  value. While each of the cleaning formulations which contain STPP along with "Merpol" SE, "Merpol" SH, or "Merpol" HCS provide good cleaning efficiency (see Table II), those cleaning formulations which contain STPP, "Merpol" SH, fluorosurfactant, and fluorochemical provide the carpet with the best resoiling performance as shown in

25 above Table III.

**EXAMPLE 2**

This example illustrates the superior cleaning efficiency properties of the cleaning formulations of this invention. These formulations are shown in Table IV below. The Cleaning Efficiency of the different formulations was measured on a soiled nylon 6 carpet composed of nylon 6 fibers having voids in their cross-sections as described in U.S. Patent 3,745,061 per the Test Methods described above.

**TABLE IV**  
**CLEANING FORMULATIONS**

(Concentration In Grams of Ingredient Per Gallon of Cleaning Formulation)

Formulation No.	Builder A	Nonionic Surfactant	Fluoro-Surfactant	Fluoro-Chemical	Stain Resist
Control 5*					
Control 12*					
T-17B**	10	10	1	0	0
T-18A**	10	10	2	250	0
T-19**	15	15	5	245	250

\* The composition of commercially available controls 5 and 12 is unknown.

\*\* Builder A is sodium tripolyphosphate  
Nonionic surfactant is "Merpel" SH  
Fluorosurfactant is "Zonyl" 7950  
Fluorochemical is "Zonyl" 5180  
Stain resist is "Zelan" 338

**TABLE V**  
**CLEANING EFFICIENCY**

5 (Percent Change  $\Delta E$  Measured For 0 To 5 Wand Passes)

CLEANING FORMULATION	NO. OF WAND PASSES			
	0	1	3	5
Control 5	0%	-9%	30%	47%
Control 12	0%	-3%	35%	48%
T-17B	0	35%	62%	70%
T-18A	0	9%	42%	53%
T-19	0	26%	53%	60%

10 Clearly, the formulations of this invention (T-17B, T-18A, T-19) have a faster cleaning rate (percent change in  $\Delta E$  after 1 wand pass) and a better cleaning ceiling (percent change in  $\Delta E$  after 5 wand passes) than that of the best commercially available cleaners tested (Controls 5 and 12).

15 **TABLE VI**  
**RESOILING PERFORMANCE**

CLEANING FORMULATION	$\Delta E$
None*	14.3
T-17B	13.1
T-18A	11.9
T-19	9.7

20 The carpet used for measuring the resoiling performance was a new, clean nylon 6,6 carpet composed of nylon 6,6 fibers having voids in their cross-sections as described in U.S. Patent 3,745,061. The carpet was not topically treated with a fluorochemical soil-resist agent by the carpet manufacturer. The new carpet was washed with the specified cleaning formulation, dried at room temperature, and  
25 then tested for resoiling performance per the drum method described under the above Test Methods. In the above Table VI, a lower  $\Delta E$  value means the carpet resisted resoiling better than a carpet with a higher  $\Delta E$  value. Since cleaning

formulation T-17B contained fluorosurfactant, less soil stuck to the carpet which was cleaned with the T-17B formulation versus the new carpet which was not cleaned with any formulation. Cleaning formulation T-18A was similar to T-17B except that it also contained a fluorochemical soil resist ("Zonyl" 5180). Thus, 5 T-18A had better resoiling properties than T-17B. Lastly, formulation T-19 also contained a stain resist ("Zelan" 338) and it had still better resoiling properties than T-17B and T-18A.

10 \* This control carpet was not washed; rather, it was tested in its original clean condition.

### EXAMPLE 3

15 This example illustrates that the cleaning formulations of this invention work well on all types of carpet, regardless of carpet face fiber type, fiber cross-section and with or without pretreatment of the carpet with a fluorochemical prior to soiling. In most instances, the formulations of this invention (T-17B and T-18A) have a better cleaning rate (percent change in  $\Delta E$  after one wand pass) and better cleaning ceiling (percent change in  $\Delta E$  after 5 wand passes) than the commercially available cleaning formulation, Control 5.

20

**TABLE VII**  
**CLEANING EFFICIENCY**

5 (Percent Change in  $\Delta E$  Measured for 0 to 5 Wand Passes)

		No. of Wand Passes			
FORMULATION	CARPET TYPE	0	1	3	5
Control 5	Nylon 6 trilobal	0%	-9%	30%	47%
	Nylon 6,6 trilobal	0%	17%	49%	60%
	Nylon 6 trilobal & FC*	0%	-3%	36%	51%
	Nylon 6,6 trilobal & FC*	0%	19%	53%	62%
	Nylon 6,6 Legacy**	0%	14%	51%	69%
T-17B	Nylon 6 trilobal	0%	35%	62%	70%
	Nylon 6,6 trilobal	0%	32%	57%	65%
	Nylon 6 trilobal & FC	0%	47%	72%	76%
	Nylon 6,6 trilobal & FC	0%	50%	70%	76%
	Nylon 6,6 Legacy	0%	32%	62%	73%
T-18A	Nylon 6 trilobal	0%	9%	42%	53%
	Nylon 6,6 trilobal	0%	30%	49%	59%
	Nylon 6 trilobal & FC	0%	43%	63%	68%
	Nylon 6,6 trilobal & FC	0%	28%	49%	60%
	Nylon 6,6 Legacy	0%	30%	56%	72%


10 \* FC - treated with fluorochemical by carpet manufacturer.

\*\* Legacy is carpet made from DuPont "Antron" Legacy nylon 6,6 fibers.


### CLAIMS

1. An aqueous cleaning formulation comprising:
  - (a) 0.1 to 50 grams of an inorganic or organic builder per gallon of  
5 cleaning formulation,
  - (b) 0.1 to 100 grams of a mixed alkyl ethoxylate (C<sub>10</sub>-C<sub>16</sub>) nonionic  
surfactant, with a hydrophile-lipophile balance value in the range of 10.5 to 15,  
per gallon of cleaning formulation, and  
10
  - (c) 0.1 to 100 grams of a fluorosurfactant per gallon of cleaning  
formulation.
2. The aqueous cleaning formulation of claim 1, further comprising 1.0 to  
15 500 grams of soil-resist agent per gallon of cleaning formulation.
3. The aqueous cleaning formulation of claim 2, wherein the soil-resist  
agent is a fluorochemical.
- 20 4. The aqueous cleaning formulation of claim 1, further comprising 1.0 to  
500 grams of stain-resist agent per gallon of cleaning formulation.
5. The aqueous cleaning formulation of claim 4, wherein the stain-resist  
agent is selected from the group consisting of a polymer of hydrolyzed maleic  
25 anhydride with an aliphatic alpha olefin, an aromatic olefin, or vinyl ether and a  
polymer of methacrylic acid.
6. The aqueous cleaning formulation of claim 1, further comprising a  
fluorochemical soil-resist agent and a stain-resist agent.  
30
7. The aqueous cleaning formulation of claim 1, wherein the builder is an  
inorganic builder selected from the group consisting of sodium tripolyphosphate,  
sodium sesquicarbonate and mixtures thereof.
- 35 8. The aqueous cleaning formulation of claim 1, wherein the builder is an  
organic builder.

9. The aqueous cleaning formulation of claim 1, wherein the fluorosurfactant comprises a mixture of the compounds of Formula I and Formula II:

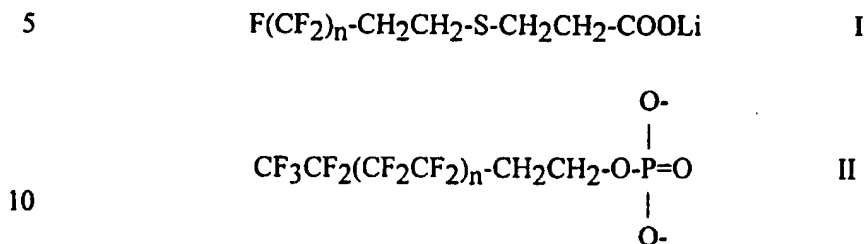

10. The aqueous cleaning formulation of claim 1, wherein the inorganic builder is sodium tripolyphosphate, the mixed alkyl ethoxylate (C<sub>10</sub>-C<sub>16</sub>) nonionic surfactant has a hydrophile-lipophile balance value of 12.8, and the fluorosurfactant comprises a mixture of the compounds of Formula I and Formula II:

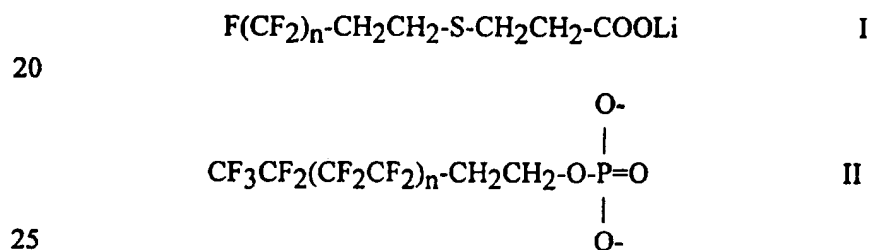

11. The aqueous cleaning formulation of claim 8, wherein the concentration of sodium tripolyphosphate is about 1 to 30 grams/gallon of the formulation, the concentration of mixed alkyl ethoxylate nonionic surfactant is about 1 to 30 grams/gallon of the formulation, and the concentration of fluorosurfactant is about 1 to 20 grams/gallon of the formulation.

12. A cleaning concentrate suitable for making an aqueous cleaning formulation, comprising:

35 (a) an inorganic or organic builder, (b) a mixed alkyl ethoxylate (C<sub>10</sub>-C<sub>16</sub>) nonionic surfactant with a hydrophile-lipophile balance value in the range of 10.5 to 15, and (c) a fluorosurfactant, whereby the concentrate is capable of being diluted with an appropriate amount of water to produce an aqueous cleaning formulation having a concentration of 0.1 to 50 grams of inorganic or organic

40 builder per gallon of cleaning formulation, 0.1 to 100 grams of mixed alkyl

ethoxylate (C<sub>10</sub>-C<sub>16</sub>) nonionic surfactant, with a hydrophile-lipophile balance value in the range of 10.5 to 15, per gallon of cleaning formulation, and 0.1 to 100 grams of fluorosurfactant per gallon of cleaning formulation.

5           13. The cleaning concentrate of claim 12, further comprising a soil-resist agent, whereby the concentrate is capable of being diluted with an appropriate amount of water to produce an aqueous cleaning formulation having a concentration of 0.1 to 50 grams of inorganic or organic builder per gallon of cleaning formulation, 0.1 to 100 grams of mixed alkyl ethoxylate (C<sub>10</sub>-C<sub>16</sub>)  
10 nonionic surfactant, with a hydrophile-lipophile balance value in the range of 10.5 to 15, per gallon of cleaning formulation, 0.1 to 100 grams of fluorosurfactant per gallon of cleaning formulation, and 0.1 to 500 grams of soil-resist agent per gallon of cleaning formulation.

15           14. The cleaning concentrate of claim 12, further comprising a stain-resist agent, whereby the concentrate is capable of being diluted with an appropriate amount of water to produce an aqueous cleaning formulation having a concentration of 0.1 to 50 grams of inorganic or organic builder per gallon of cleaning formulation, 0.1 to 100 grams of mixed alkyl ethoxylate (C<sub>10</sub>-C<sub>16</sub>)  
20 nonionic surfactant, with a hydrophile-lipophile balance value in the range of 10.5 to 15, per gallon of cleaning formulation, 0.1 to 100 grams of fluorosurfactant per gallon of cleaning formulation, and 0.1 to 500 grams of stain-resist agent per gallon of cleaning formulation.

25           15. The cleaning concentrate of claim 12, further comprising a soil-resist and stain-resist agent, whereby the concentrate is capable of being diluted with an appropriate amount of water to produce an aqueous cleaning formulation having a concentration of 0.1 to 50 grams of inorganic or organic builder per gallon of cleaning formulation, 0.1 to 100 grams of mixed alkyl ethoxylate (C<sub>10</sub>-C<sub>16</sub>)  
30 nonionic surfactant, with a hydrophile-lipophile balance value in the range of 10.5 to 15, per gallon of cleaning formulation, and 0.1 to 100 grams of fluorosurfactant per gallon of cleaning formulation, 0.1 to 500 grams of soil-resist agent per gallon of cleaning formulation, and 0.1 to 500 grams of stain-resist agent per gallon of cleaning formulation.


35

16. A method of using the aqueous cleaning formulation of claim 1 to clean a textile fabric having soil on its surface comprising the steps of spraying the formulation having a temperature in the range of room temperature to 160°F onto

the surface of the textile fabric such that at least some of the soil on the surface is loosened; and removing the loosened soil.

17. The method of claim 16, wherein the loosened soil is removed by a  
5 vacuuming means.

18. The method of claim 16, wherein the textile fabric is a carpet.

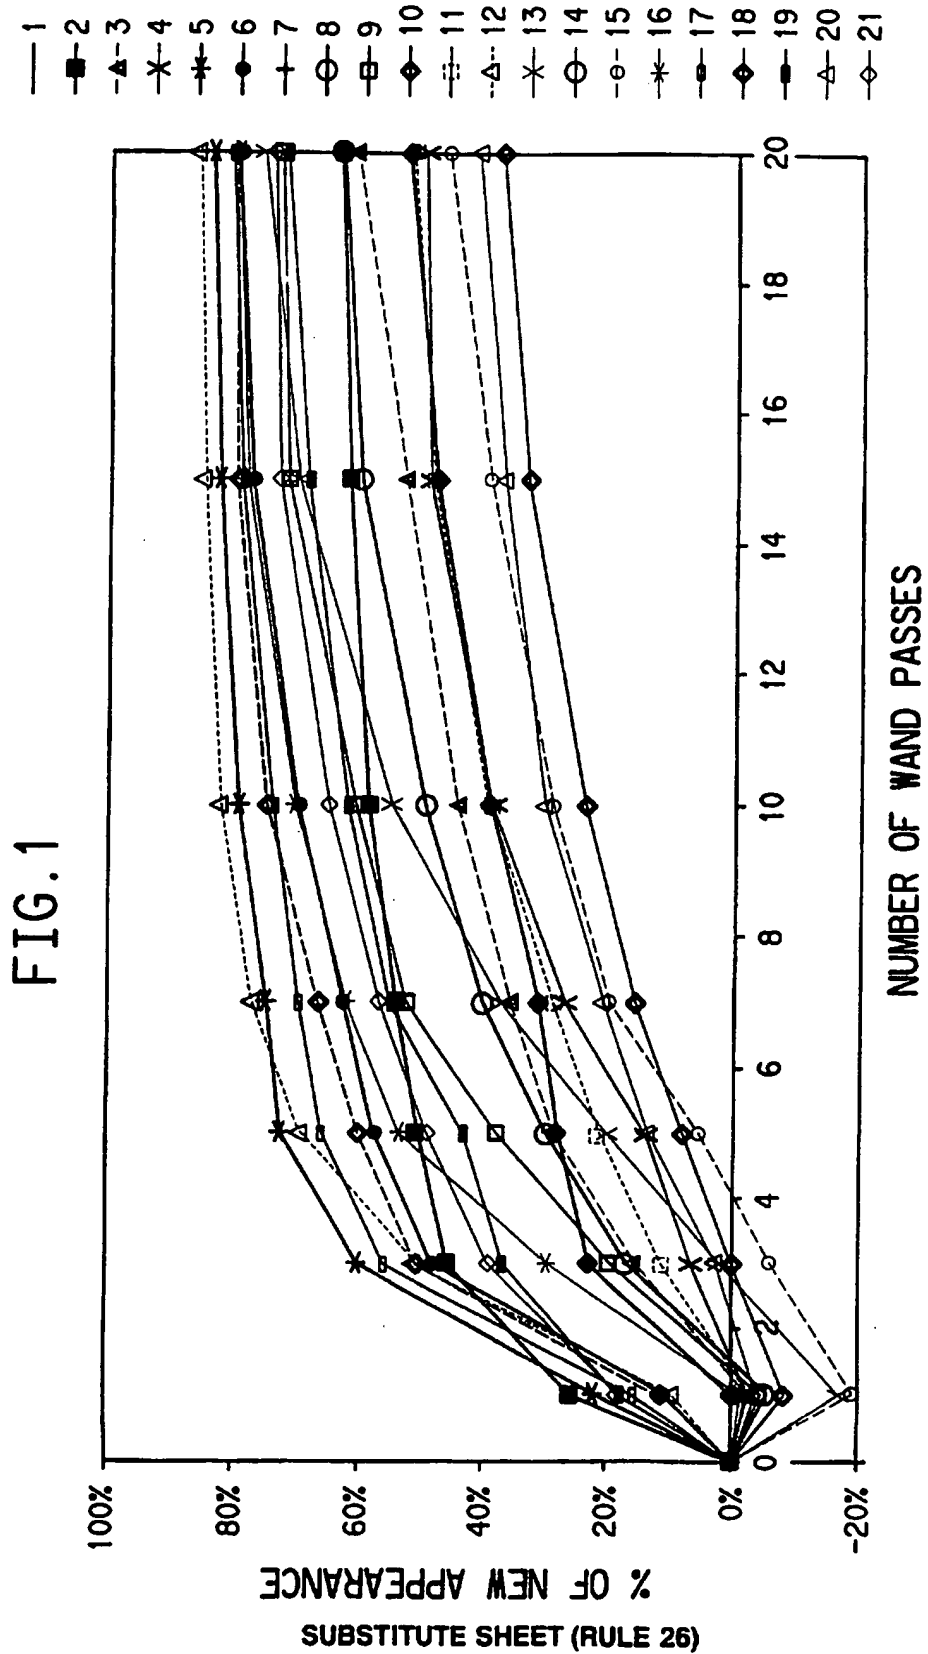

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 97/06430

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 C11D1/00 C11D3/00 C11D3/37

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 C11D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CA 1 323 819 A (STERLING DRUG INC) 2 November 1993 see page 4, line 9-28 see page 5, line 14 - line 26 see page 6, line 18 - line 28 see page 8, line 17 - line 21 see claims	1-3,8,9, 12
A	--- US 5 338 475 A (COREY GARLAND P ET AL) 16 August 1994 see column 2, line 19 - line 31 see claims	1-3,8-16
A	--- EP 0 648 834 A (EASTMAN KODAK CO) 19 April 1995 see claims; examples --- -/-	1-10,16

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \* "A" document defining the general state of the art which is not considered to be of particular relevance
- \* "E" earlier document but published on or after the international filing date
- \* "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \* "O" document referring to an oral disclosure, use, exhibition or other means
- \* "P" document published prior to the international filing date but later than the priority date claimed

\* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\* "&" document member of the same patent family

Date of the actual completion of the international search

19 August 1997

Date of mailing of the international search report

29. 08. 97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Pelli Wablat, B

# INTERNATIONAL SEARCH REPORT

Intern. Application No.

PCT/US 97/06430

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 948 819 A (WILDE ARTHUR G) 6 April 1976 see abstract; claims ---	1-4,8-16
A	DE 27 10 306 A (WACK OSKAR) 14 September 1978 see claims -----	1

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 97/06430

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CA 1323819 A	02-11-93	AU 623690 B AU 4287589 A JP 2255900 A	21-05-92 17-05-90 16-10-90
US 5338475 A	16-08-94	NONE	
EP 0648834 A	19-04-95	US 5439610 A AU 675350 B AU 7586594 A CA 2132894 A	08-08-95 30-01-97 11-05-95 20-04-95
US 3948819 A	06-04-76	BE 767363 A CA 945033 A CH 552667 A DE 2125836 A FR 2093525 A GB 1348267 A NL 7106367 A SE 374131 B	19-11-71 09-04-74 15-08-74 02-12-71 28-01-72 13-03-74 23-11-71 24-02-75
DE 2710306 A	14-09-78	NONE	

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☒ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**